
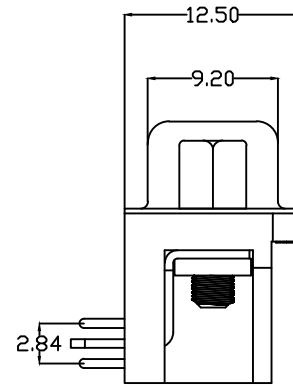


Explain:

- Characteristic:
 - Rated voltage :250V AC Maximum
 - Rated current :maximum 3A
 - Contact impedance :30mΩ MAX.
 - Insulation impedance :3000MΩ MIN. at 500V DC
 - Withstand voltage value :250V AC RMS for 1Minute
 - working temperature : -45°C~+85°C
- Material Science:
 - Rubber Core : PBT rated or PA9T rated
 - Terminal : Copper alloy
 - Shell : Passivation treatment after SPCC or copper alloy or stainless steel nickel plating
 - Harpoon : SPCC or copper alloy, tin plated
 - Rivet : Copper alloy, nickel plated
 - Screw : Ferroalloy/copper alloy, nickel plated

205C 15 M W X X XX X X A X
 1 2 3 4 5 6 7 8 9 10 11

- Serial number:
 - 205C=DR head 7.2 rivet lock punch
- PIN distinguishing:
 - 09=9PIN 15=15PIN 25=25PIN 37=37PIN
- Male female distinction:
 - F=mother M=male
- Traditional simple distinction:
 - C=tradition J=Semi simple W=Indistinguishable
- Plastic division:
 - 1=PBT Black glue 2=PBT Flame retardant black glue
 - 9=PA9TBlack glue
- Electroplating division:
 - A=Semigold tin G=All gold
- Plating Thickness:
 - 00=0.6u-0.8u gold 01=1u gold 02=2u gold....
 - remarks: If the product is a semi gold tin 00 number, those representing gold μ The rest is tinned by default 80 μ - one hundred and ten μ
- Enclosure differentiation:
 - A=Iron shell 12H B=Iron shell 24H C=Iron shell 48H
 - D=Copper shell E=Stainless steel passivation
 - F=Stainless steel nickel plating G=Gold plated iron shell
- Harpoon distinction:
 - 1=Iron harpoon 12H 2=Iron harpoon 24H 3=Copper harpoon
- Rivet differentiation:
 - A=5.4*5.1*1.2 rivet
- Screw differentiation:
 - A=4.8 Iron screw B=5.8 Iron screw C=4.8 Copper screw
 - D=5.8 Copper screw E=4.8 Gold plated iron screws
 - F=5.8 Gold plated iron screws G=4.8*15.0 Iron screw
 - H=4.8*13.0 Iron screw I=4.8*13.0 Copper screw

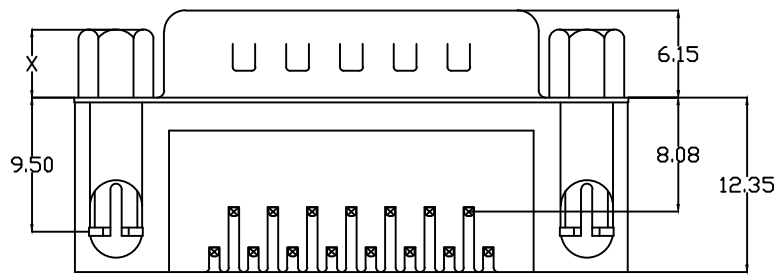

Screw specifications

Part Number	Xsize	Lsize	Internal tooth
A/C/E	4.8	7.0	4#40
B/D/F	5.8	7.0	4#40
G	4.8	10.2	4#40
H/I	4.8	8.2	4#40

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5'
0.	±0.5
.0	±0.3
.00	±0.2

QIANGTS 深圳市强泰盛电子有限公司
 Shenzhen Qiangtaisheng Electronic Co. LTD.
 TEL:86-755-82599792 FAX:86-755-27313473

SCALE: AS SHOWN	UNIT: mm
DRAWN WAN	07/07/08
CHECKED CHEN	07/07/08
APPROVED CHEN	07/07/08

DRAWN NAME: DR15 male rivet lock
 PRODUCT NO. 205C15MWXXXXXX
 FILE NAME: 205C15MWXXXXXX

REV.	DESCRIPTION	DATE
A	ECN-20130617001(WAN)	06/17/13