
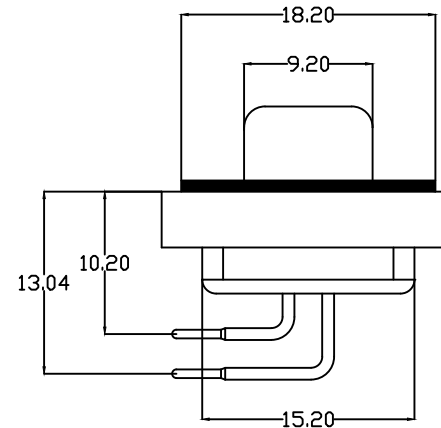


P.C.B LAYOUT

Explain:

- 1.Characteristic:
 - Rated voltage :500V AC MIN
 - Rated current :5A
 - Contact impedance :30mΩ MAX.
 - Insulation impedance :5000MΩMIN. at 500V DC
 - Withstand voltage value :500V AC RMS for 1Minute
 - Temperature range : -55°C--+105°C
 - Waterproof grade :IP67
- 2.Material Science:
 - Rubber core : PBT Fiber adding 30%(UL94V-0) (Black White)
 - Car PIN : C3602(BRASS),gold-plated3U "
 - Iron shell : SPCC, Front shell nickel plating
 - Rear shell tin plating
- 3.matters needing attention:
 - a.No oxidation and rust after salt spray test for 24H
 - b.The finished product shall be free of defective bent needles.

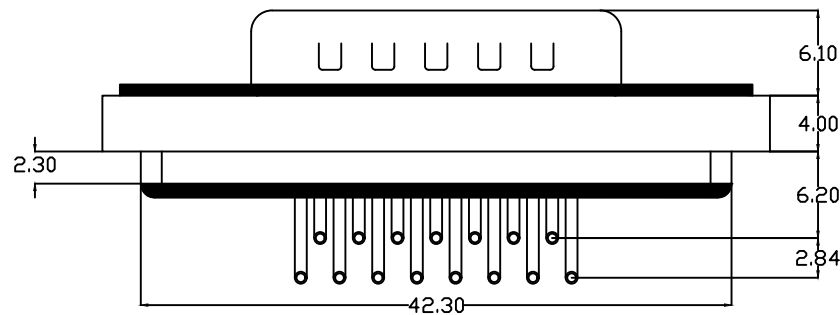

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2

QIANGTS 深圳市强泰盛电子有限公司
Shenzhen Qiangtaisheng Electronic Co. LTD.
TEL:86-755-8259792 FAX:86-755-27313473

SCALE: AS SHOWN	UNIT: mm
DRAWN WAN	06/17/13
CHECKED CHEN	06/17/13
APPROVED CHEN	06/17/13

DRAWN NAME:
DR15 bus needle bending 9.4 waterproof riveting

A ECN-20130617001(WAN)

06/17/13

APPROVED CHEN 06/17/13

PRODUCT NO.

REV.	DESCRIPTION	DATE	SIZE A4	REV. A	FILE NAME:
------	-------------	------	---------	--------	------------