

Waterproof screw specifications are attached

Part Numbers	Xsize	Asize	In the teeth
	4.8	3.2	4#40
	4.8	7	4#40
	5.8	7	4#40

Instructions:

1.Features:



- The rated voltage :500V AC MIN
- Rated current :5A
- Contact impedance :30mΩ MAX.
- Insulation impedance :5000MΩMIN. at 500V DC
- Resistance to voltage value :500V AC RMS for 1Minute
- Temperature range : -55℃~+105℃
- Waterproof level :IP67

2.Material:

- Rubber core : PBT Add fine 30%(UL94V-0)
(Black, white)
- Car PIN : C3602(BRASS), Gold plated 3U "
- The iron shell : SPCC. The front shell is nickel plated and the rear shell is tin plated

3.Matters needing attention:

- a.Salt spray test 24H can not have oxidation rust phenomenon
- b.The finished product should not have broken bent needles.

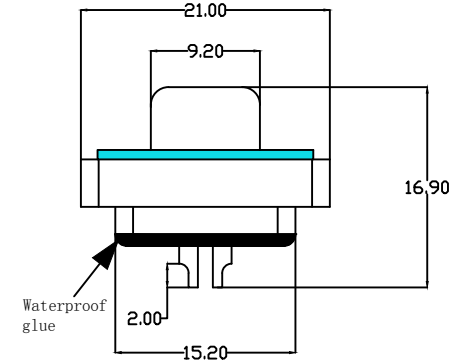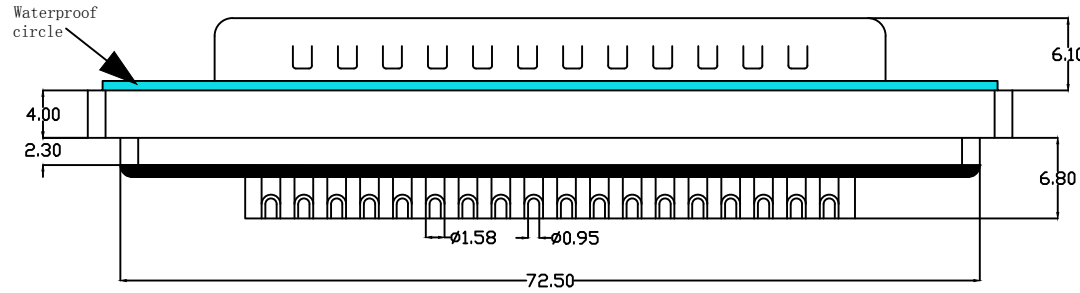

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2


 深圳市强泰盛电子有限公司
 Shenzhen Qiangtaisheng Electronic Co. LTD.
 TEL.:86-755-8259792 FAX:86-755-27313473

SCALE: AS SHOWN	UNIT: mm
DRAWN WAN	06/17/13
CHECKED CHEN	06/17/13
APPROVED CHEN	06/17/13

DRAWN NAME:
 DB37 bus pin riveting
 PRODUCT NO.

A ECN-20130617001(WAN)

06/17/13 APPROVED CHEN 06/17/13

REV.	DESCRIPTION	DATE	SIZE	REV.	FILE NAME:
1			A4	A	