
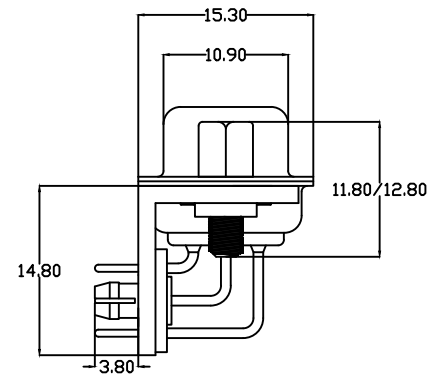


Instructions:



- Features:
 - Rated voltage :500V AC MIN
 - Rated current current :5A
 - Impedance of contact :30mΩ MAX.
 - Resistance of insulation :3000MΩMIN. at 500V DC
 - Voltage resistance value :500V AC RMS for 1Minute
 - Scope of work : -55℃~+105℃
 - Shell salt spray : More than 48H
- Material:
 - Rubber core : PBT rated
 - Car PIN : Copper alloy
 - The shell : Iron alloy/The front shell of copper alloy is nickel plated and the rear shell is tin plated
 - Stents : Iron alloy/Copper alloy, nickel plated
 - The rivet : Copper alloy, nickel plated
 - The harpoon : Copper alloy, tin plated
 - archives : PA9T, yellow
 - Screw : Iron alloy/Copper alloy, nickel plated

Specification of screws			
Part number	Xsize	In the teeth	
A/C	4.8	4#40	
B/D	5.8	4#40	

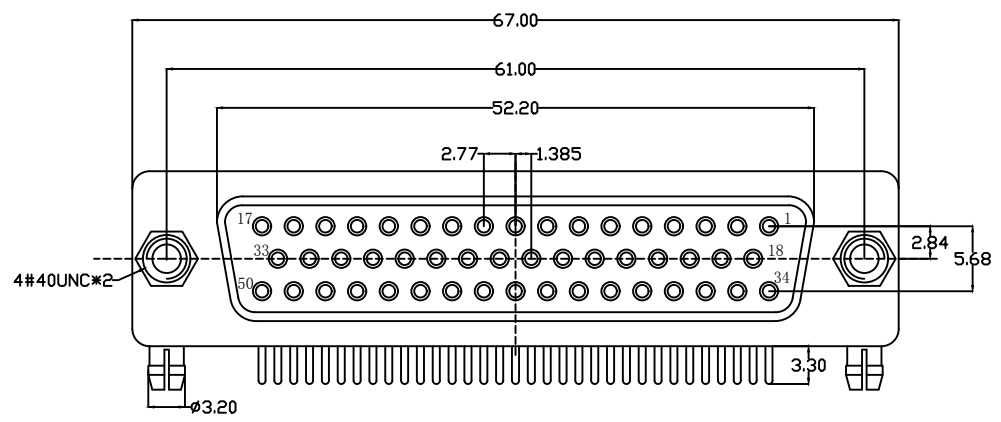

208G 50 F X X XX C X X 4 B X
 1 2 3 4 5 6 7 8 9 10 11 12

- Serial number:
 - 208G=DR Needle bend 9.4 rivet lock
- PIN bit differentiation:
 - 09=9PIN 15=15PIN 25=25PIN
 - 37=37PIN 50=50PIN
- Male female distinction:
 - F=The mother M=The male
- Distinction of plastic:
 - 1=PBT White glue 2=PBT vinyl
- Terminal material differentiation:
 - H=brass P=Phosphor copper
- The terminal electroplating μs are differentiated:
 - 01=1u gold AA=1.5u gold 02=2u gold....
- Terminal Specifications Distinction:
 - C=conventional
- Division of shell:
 - 1=The iron shell 2=Copper shell
- Differentiation of bracket:
 - I=12.24 Iron bracket with plate
 - J=12.24 Copper bracket belt plate
- Differentiation of harpoon:
 - 4=Four claw harpoon 5=Harpoon free
- Distinction of rivet:
 - B=5.4*4.4*1.2 Distinction of rivet
- Screw differentiation:
 - A=4.8 Iron screw B=5.8 Iron screw
 - C=4.8 Copper screw D=5.8 Copper screw

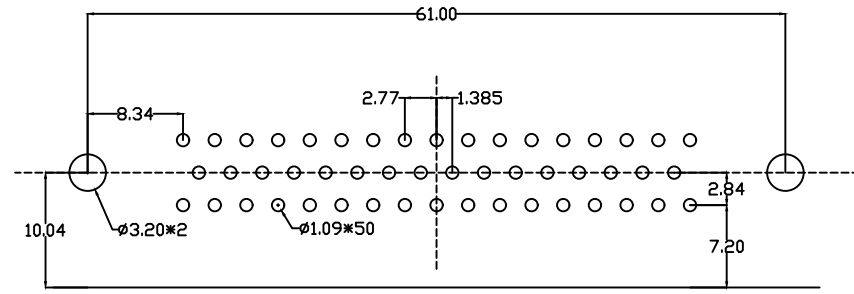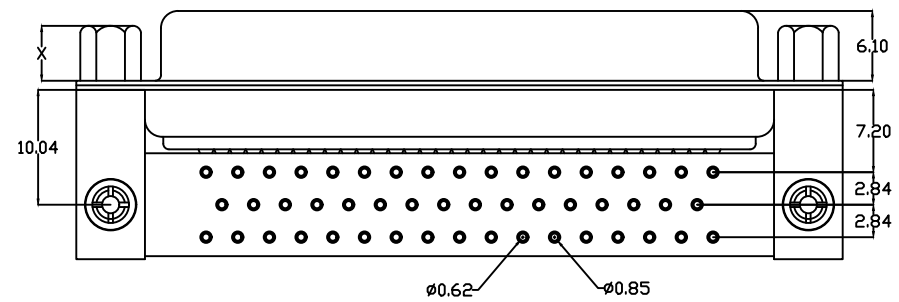

P.C.B LAYOUT

UNLESS OTHERWISE SPECIFIED TOLERANCE	
ANG.	±5°
0.	±0.5
.0	±0.3
.00	±0.2

QIANGTS 深圳市强泰盛电子有限公司
 Shenzhen Qiangtaisheng Electronic Co. LTD.
 TEL:86-755-82599792 FAX:86-755-27313473

SCALE: AS SHOWN	UNIT: mm
DRAWN WAN	06/17/13
CHECKED CHEN	06/17/13
APPROVED CHEN	06/17/13

DRAWN NAME:	DR50 mother car needle with 12.24 bracket with harpoon with plate rivet lock
PRODUCT NO.	208G50FXXXXCXX4BX
FILE NAME:	208G50FXXXXCXX4BX

REV.	DESCRIPTION	DATE
A	ECN-20130617001(WAN)	06/17/13