
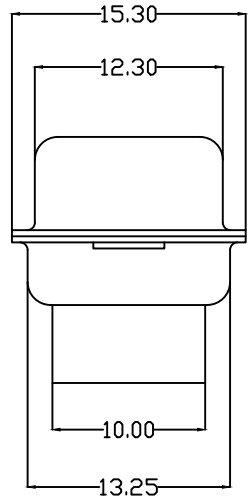


Explain:

1. characteristic:
 Insulation impedance :3000MΩMIN. at 500V DC
 Withstand voltage value :250V AC RMS for 1Minute
 temperature range : -45℃~+85℃
2. Material Science:
 Rubber core : PBT rated (black)
 Iron shell : SPCC, Front shell nickel plating Rear shell tin plating

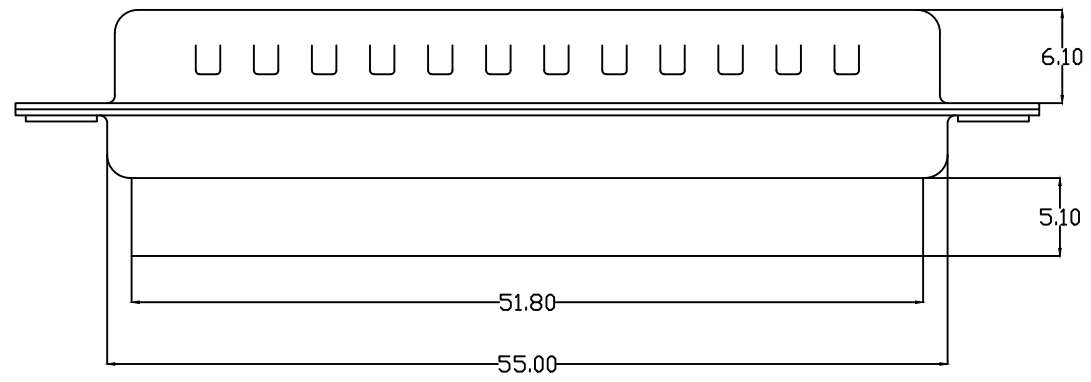

110A 78 M 1 X
 1 2 3 4 5

1. Serial number:
 110A=HDEC end punched optical hole
2. PIN distinguishing:
 15=15PIN 26=26PIN 44=44PIN
 62=62PIN 78=78PIN
3. Male female distinction:
 F=female M=male
4. Male plastic division:
 1=Black glue
5. Iron shell division:
 A=Iron shell 12H B=Iron shell 24H
 C=Iron shell 48H D=Copper shell
 E=Stainless steel passivation
 F=Stainless steel nickel plating
 G=Gold plated iron shell

UNLESS OTHERWISE SPECIFIED TOLERANCE		深圳市强泰盛电子有限公司 Shenzhen Qiangtaisheng Electronic Co. LTD. TEL:86-755-82599792 FAX:86-755-27313473	
ANG.	±5°		
0.	±0.5		
.0	±0.3		
.00	±0.2		
SCALE:	AS SHOWN	UNIT:	mm
DRAWN	WAN	07/07/08	DRAWN NAME: HDEC78 male
CHECKED	CHEN	07/07/08	end type optical hole
APPROVED	CHEN	07/07/08	PRODUCT NO. 110A78M1X
REV.		DATE	FILE NAME: 110A78M1X

A	ECN-20130617001(WAN)	06/17/13
REV.	DESCRIPTION	DATE